



## OEM Pressure Sensor with Ceramic Sensor Element



measuring  
• monitoring  
• analysing

### SEN-96



- Gauge pressure
- Measuring range:  
1... 0 bar ... 0 ... +600 bar
- Measuring span from 1 bar
- Temperature (medium):  
25 ... +100 °C
- Accuracy: 0.5 % (0.75%) of full scale
- Material: stainless steel and ceramic
- Elec. connection: DIN Plug or M12



P2

KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, RUSSIA, SPAIN, SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH  
Nordring 22-24  
D-65719 Hofheim/Ts.  
Head Office:  
+49(0)6192 299-0  
+49(0)6192 23398 info.  
@kobold.com www.kobold.com



**Description**

The KOBOLD SEN-96 standard model is an electronic transmitter with ceramic sensor for air, industrial, technical gases, water and oil, designed to be installed in gas distribution plants, on bottles, on refrigerators, on compressors, on vacuum pumps and hydraulics and water high pressure plants.

**Technical Details**

Ranges: 0 ... 1/0 ... 600 bar, relative,  
-1 ... 0/-1 ... +24 bar, relative

Accuracy:  $\leq \pm 0.5\%$  of full scale<sup>1)</sup>  
(all ranges except C 315, B 025 and A 165)  
 $\leq \pm 0.75\%$  of full scale<sup>1)</sup>  
(for ranges C 315, B 025 and A 165)

Non-linearity (BFSL):  $\leq \pm 0.25\%$  of full scale,  
(all ranges except C 315, B 025 and A 165)  
 $\leq \pm 0.5\%$  of full scale,  
(for ranges C 315, B 025 and A 165)  
according to EN 61298-2

Non-repeatability:  $\leq 0.1\%$  of full scale,  
according to EN 61298-2

Output signal deviation of zero:  $\leq \pm 0.5\%$  of span, typical;  
 $\leq \pm 0.75\%$  of span, max.

Thermal drift: 0 ... 80 °C, 1 % of span<sup>3)</sup>;  
2.5 % of span, max.

Long term drift:  $\leq 0.1\%$  of span,  
according to EN 61298-2

Process fluid temp: -25 ... +100 °C

Ambient temperature: -25 ... +85 °C

Stocking temperature: -30 ... +85 °C

Output signals: 4... 20 mA, 0...5 V<sub>DC</sub>, 0...10 V<sub>DC</sub>,  
1... 5 V<sub>DC</sub>, 0.5... 4.5 ratiometric V<sub>DC</sub>

Response time: <4 ms

Emission and immunity: according to EN 61326, (group 1 -  
class B; industrial applications)

Process connection: AISI 316L (1.4404),  
hole  $\varnothing$  2.5 mm

Sensor: ceramic in Al<sub>2</sub>O<sub>3</sub>

Case: AISI 316L (1.4404)

Gasket (Sensor): FKM


Electric connection: EN 175301-803 Form A Plug (IP65)  
M12x1 Plug (IP67)

Protection degree: IP 65 according to IEC 529 /  
EN 60529<sup>2)</sup>

Weight: 0.12 kg

Measuring ranges [bar, relative]	Overpressure limit [bar, relative]
-1 ... 0	5
-1 ... 0.6	5
-1 ... 1.5	5
-1 ... 3	8
-1 ... 5	12
-1 ... 9	20
-1 ... 15	32
-1 ... 24	50
0 ... 1/0...1.6/0... 2.5	5
0 ... 4	8
0 ... 6	12
0 ... 10	20
0 ... 16	32
0 ... 25	50
0 ... 40	80
0 ... 60	120
0 ... 100	200
0 ... 160	320
0 ... 250	500
0 ... 400	600
0 ... 600	800

**Dimensions [mm]**

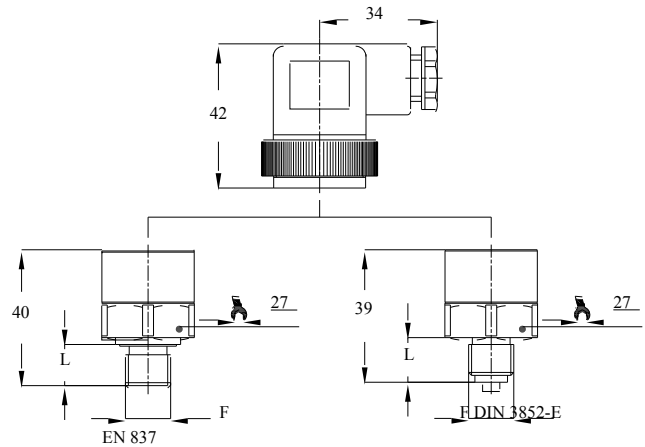


F <sup>1)</sup>	L [mm]
A - G 1/2, male EN 837	20
B - G 1/4, male EN 837	13
E - G 1/4, male DIN 3852-E <sup>2)</sup>	13
F - 1/2 - 14" NPT	20
G - 1/4 - 18" NPT	13

<sup>1)</sup> Torque 20...30 Nm  
<sup>2)</sup> For pressures up to 400 bar

<sup>1)</sup> Including non-linearity, hysteresis, non-repeatability and output signal deviation of zero at the reference conditions described in standard EN 61298-1  
<sup>2)</sup> With properly assembled electric connection  
<sup>3)</sup> For measuring ranges C 315 ... C 565, B 025 and A 165  
Other ranges available on demand. Units of measurement available in psi, MPa, kPa too

**Wiring Diagram**

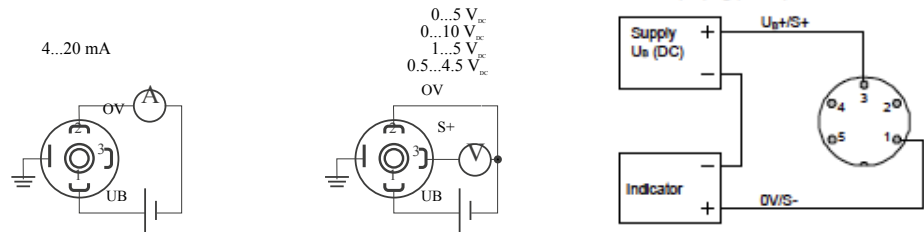

**Order Details (Example: SEN-9601 0 B075 A 0)**

Model	Output	Measuring range	Mechanical connection	Options
SEN-9601 (DIN Plug)	... 0 ... = 4 - 20 mA, 2-wire (standard)...	C 315 = -1 ... 0 bar C 505 = -1 ... 0.6 bar C 515 = -1 ... 1.5 bar C 525 = -1 ... 3 bar C 535 = -1 ... 5 bar C 545 = -1 ... 9 bar C 555 = -1 ... 15 bar C 565 = -1 ... 24 bar	A = G 1/2, male (standard)	0 = without Y = special option (specify in clear text)
SEN-9630 (M12 Plug)	1 ... = 0 ... 5 V <sub>dc</sub> (8 ... 30 V <sub>dc</sub> )... 2 ... = 0 ... 10 V <sub>dc</sub> (14 ... 30 V <sub>dc</sub> )... 3 ... = 0.5 ... 4.5 V <sub>dc</sub> ratiometric (5 V <sub>dc</sub> ±10%) ... 4 ... = 1 ... 5 V <sub>dc</sub> (8 ... 30 V <sub>dc</sub> )	B 025 = 0 ... 1 bar B 035 = 0 ... 1.6 bar B 045 = 0 ... 2.5 bar B 055 = 0 ... 4 bar B 065 = 0 ... 6 bar B 075 = 0 ... 10 bar B 085 = 0 ... 16 bar B 095 = 0 ... 25 bar B 105 = 0 ... 40 bar B 115 = 0 ... 60 bar B 125 = 0 ... 100 bar B 135 = 0 ... 160 bar B 145 = 0 ... 250 bar B 155 = 0 ... 400 bar A 165 = 0 ... 600 bar	B = G 1/4, male (standard) E = G 1/4 DIN 3852-E, male F = 1/2" NPT, male G = 1/4" NPT, male	

Output signal	4 ... 20 mA 0	0 ... 5 V <sub>dc</sub> 1	0 ... 10 V <sub>dc</sub> 2	0.5 ... 4.5 V <sub>dc</sub> ratiometric - 3	1 ... 5 V <sub>dc</sub> 4
No. of wires	2	3	3	3	3
Load max.	$R_L \leq (UB-8)/0.02 \Omega$	$R_L \geq 5 \text{ k}\Omega$	$R_L \geq 10 \text{ k}\Omega$	$R_L \geq 4.5 \text{ k}\Omega$	$R_L \geq 5 \text{ k}\Omega$
Supply: UB	8 ... 30 V <sub>dc</sub>	8 ... 30 V <sub>dc</sub>	14 ... 30 V <sub>dc</sub>	5 ±10%	8 ... 30 V <sub>dc</sub>
Absorbed current (mA) max.	< 25	< 10	< 10	< 10	< 10

All output signals are provided of protection against short circuit and polarity inversion. Insulation tension 500 V<sub>dc</sub>